


BULKENHANCER Firstliner Cleaner Small Class is an economic primary cleaner that cleans the belt by peeling action. It is located on front of head pulley. By using one-slab belt friendly urethane tip, this cleaner attack in sharp angle which make cleaning action that remove large portion of the carryback material. This specific type of cleaner can be used for the head pulley's diameter up to 600 mm and belt speed up to 3.0 m/s.

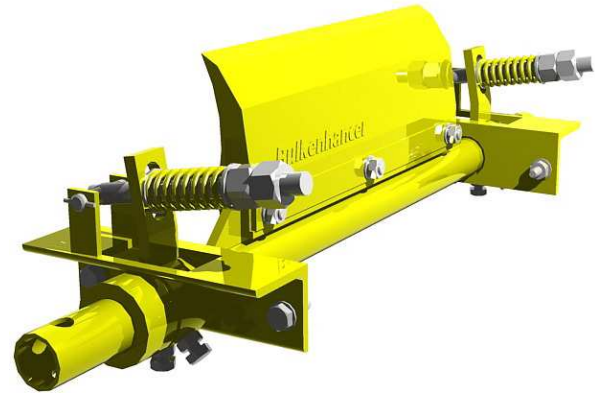


SPECIFICATION

Max Belt Speed : 3.0 m/s
Max Temp. : 95 °C (max)
Pulley Dia. : 200 – 600 mm
Surface Finish : Powder Coating

PART NUMBER : 113-TTTT-U1-X-Y-Z

TTTT : Belt Width in mm
X : Frame material; **M** for Mild Steel, **S** for Stainless Steel
Y : Tension system; **S** for Spring, **C** for Counterweight
Z : Blade coverage; **S** for Shallow, **W** for Wide

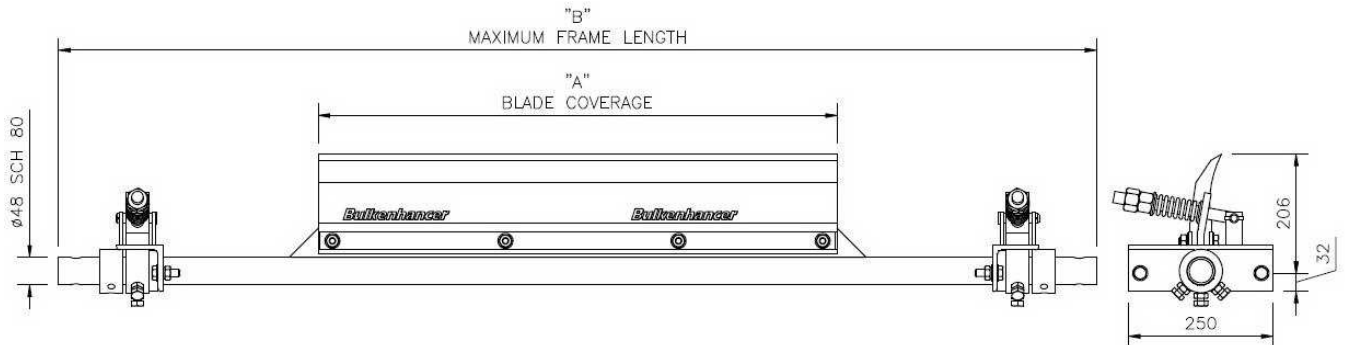

TTTT Code	Belt Width (mm)	Mainframe Length "B" (mm)	Shallow Coverage	Wide Coverage
			Total Coverage "A" (mm)	Total Coverage "A" (mm)
0450	450, 500	1200	300	450
0600	600, 650	1350	450	600
0750	750, 800	1500	600	750
0900	900	1650	750	900
1050	1000, 1050	1800	900	1050
1200	1200	2100	1050	1200
1350	1400	2250	1200	1350
1500	1500	2400	1350	1500
1650	1600	2550	1500	1650
1800	1800	2850	1650	1800
1950	2000	3000	1800	1950