


# Bulkenhancer

## TECHNICAL DATA SHEET V-Plough

**BULKENHANCER V-Plough** is an apparatus to remove the spillage that may drop into the inner side of the belt that may be trapped into the tail pulley. This type of plough can be used only to one directional conveyor and serves belt speed up to 4.5 m/s.

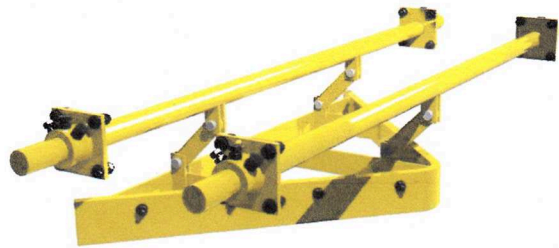

### SPECIFICATION

Max Belt Speed : 4.5 m/s

Max Temp. : 70 °C


Surface Finish : Powder Coating

**PART NUMBER : 101-TTTT-W-X**

TTTT : Belt Width in mm

W : Blade Material R1 for NBR Rubber Blade, U1 for Urethane Blade

X : Frame Material M for Mild Steel, S for Stainless Steel

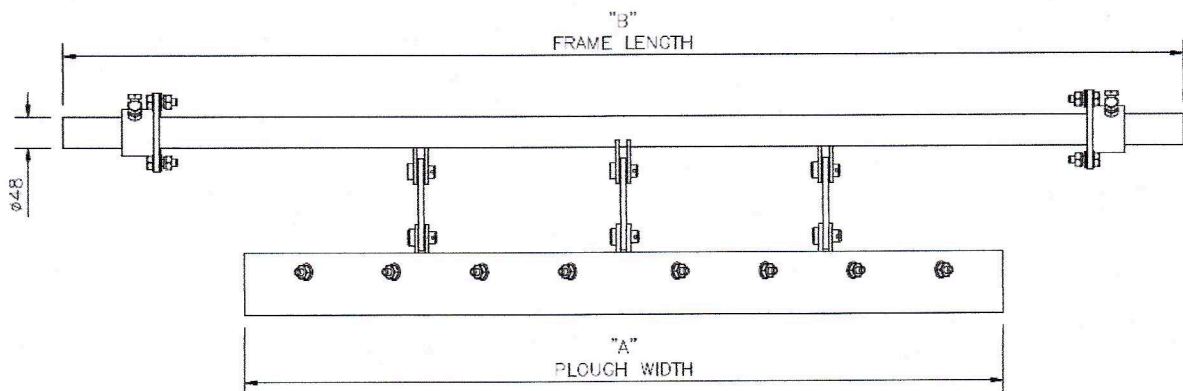

TTTT Code	Belt Width (mm)	Mainframe Length "B" (mm)	Plough Width "A" (mm)
0450	450, 500	1200	600
0600	600, 650	1350	750
0750	750, 800	1500	900
0900	900	1650	1050
1050	1000, 1050	1800	1200
1200	1200	2100	1350
1350	1400	2250	1500
1500	1500	2400	1650
1650	1600	2550	1800
1800	1800	2850	1950
1950	2000	3000	2100

Website: [www.bulkenhancer.com](http://www.bulkenhancer.com) – Inquiry to: [info@bulkenhancer.com](mailto:info@bulkenhancer.com)